

## DIGI ESL

### Elektronische Preisschilder


InfoTag ist ein elektronisches Regaletikett (ESL), das für Unternehmen entwickelt wurde, um die Digitalisierung im Geschäft zu beschleunigen. Diese intelligente Lösung kann in vorhandene IT-Systeme eingebettet werden und hilft Unternehmen bei einer Internet of Things-Infrastruktur. Dadurch werden Preisautomatisierung ermöglicht und das Kundenerlebnis verbessert.

- 6 Displaygrößen  
Verfügbar in 1,54", 2,13", 2,9", 4,2", 5,83" und 7,5"
- LED Flash Light  
Die integrierte Blitzanzeige verfügt über 5 verschiedene LED-Farben, um die visuelle Aufmerksamkeit auf den Produktstatus zu lenken, z. B. Werbeaktionen und Warenauswahl, um das Engagement und die Produktivität im Geschäft zu verbessern
- Anpassbare Rahmenfarben  
Lebendige Rahmenfarben sorgen für ein einheitliches Branding im Geschäft
- High Definition Display  
Das dreifarbige vollgrafische E-Paper-Display sorgt für eine gute Lesbarkeit bei allen Lichtverhältnissen
- Split Screen  
Nehmen Sie zusätzliche PLU- oder Preisinformationen auf, um den Regalplatz und die Nutzung für eine höhere Kapitalrendite zu maximieren. Ideal für Produkte mit kleinerer Verpackung wie Flaschengetränke und Gewürze




## Info Tag 1.54"

### Product Image



### Schematic Drawing



### Technical Specification


|                                     |   |
|-------------------------------------|---|
| Product code                        | IFT- 21544                                |
| Dimensions (mm)                     | 49 (W) x 39 (H) x 15 (D)                  |
| Standard cover frame colour         | Cool Gray 6C                              |
| LED colours                         | Red, Green, Cyan, Yellow, Magenta         |
| Display technology                  | Full graphic E Ink display                |
| Resolution (pixels)                 | 152 x 152                                 |
| Active display area (mm)            | 28 x 28                                   |
| Pixel density                       | 140dpi                                    |
| Pixel colours                       | Black, White, Red<br>Black, White, Yellow |
| Operating temperature               | 5° C to 30° C                             |
| Operating frequency                 | 2.4GHz ISM Band                           |
| Label updates / hour / access point | 21,000                                    |
| Battery lifetime                    | 5 years, 2 updates per day                |
| Battery                             | CRV2477 x 1pc                             |
| Viewing angles                      | Nearly 180 degree                         |
| Useable pages                       | 2 pages                                   |
| Encryption                          | 128-bit Advanced Encryption Standard      |
| NFC                                 | Available                                 |
| Wireless firmware update            | Yes                                       |
| Compliance                          | CE, FCC/IC, ROHS                          |

## Info Tag 2.9"

### Product Image



### Schematic Drawing

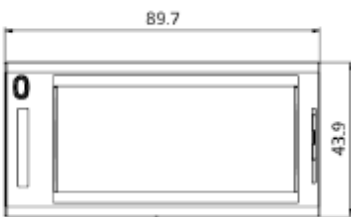

### Technical Specification



|                                     |  |
|-------------------------------------|--|
| Product code                        | IFT- 22904   |
| Dimensions (mm)                     | 90 (W) x 44 (H) x 15 (D)   |
| Standard cover frame colour         | Cool Gray 6C   |
| LED colours                         | Red, Green, Cyan, Yellow, Magenta                                    |
| Display technology                  | Full graphic E Ink display   |
| Resolution (pixels)                 | 296 x 128  |
| Active display area (mm)            | 67 x 29  |
| Pixel density                       | 112dpi   |
| Pixel colours                       | Black, White, Red<br>Black, White, Yellow<br>Black, White (low temp) |
| Operating temperature               | 5° C to 30° C<br>-20° C to 5° C (low temp)                           |
| Operating frequency                 | 2.4GHz ISM Band  |
| Label updates / hour / access point | 21,000   |
| Battery lifetime                    | 5 years, 2 updates per day   |
| Battery                             | CR2450 x 2pc   |
| Viewing angles                      | Nearly 180 degree  |
| Useable pages                       | 2 pages  |
| Encryption                          | 128-bit Advanced Encryption Standard                                 |
| NFC                                 | Available  |
| Wireless firmware update            | Yes  |
| Compliance                          | CE, FCC/IC, ROHS   |

## Info Tag 2.13"

### Product Image



### Schematic Drawing

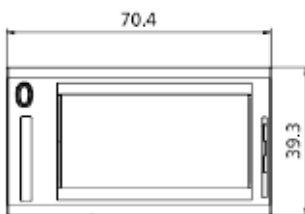

### Technical Specification

|                                     |  |
|-------------------------------------|--|
| Product code                        | IFT- 22134   |
| Dimensions (mm)                     | 70 (W) x 39 (H) x 16 (D)   |
| Standard cover frame colour         | Cool Gray 6C   |
| LED colours                         | Red, Green, Cyan, Yellow, Magenta                                    |
| Display technology                  | Full graphic E Ink display   |
| Resolution (pixels)                 | 212 x 104  |
| Active display area (mm)            | 49 x 24  |
| Pixel density                       | 111dpi   |
| Pixel colours                       | Black, White, Red<br>Black, White, Yellow<br>Black, White (low temp) |
| Operating temperature               | 5°C to 30°C<br>-20°C to 5°C (low temp)                               |
| Operating frequency                 | 2.4GHz ISM Band  |
| Label updates / hour / access point | 21,000   |
| Battery lifetime                    | 5 years, 2 updates per day   |
| Battery                             | CR2450 x 2pc   |
| Viewing angles                      | Nearly 180 degree  |
| Useable pages                       | 2 pages  |
| Encryption                          | 128-bit Advanced Encryption Standard                                 |
| NFC                                 | Available  |
| Wireless firmware update            | Yes  |
| Compliance                          | CE, FCC/IC, ROHS   |

## Info Tag 4.2"

### Product Image



### Schematic Drawing



### Technical Specification


|                                     |   |
|-------------------------------------|---|
| Product code                        | IFT- 24204                                |
| Dimensions (mm)                     | 103 (W) x 88 (H) x 17 (D)                 |
| Standard cover frame colour         | Cool Gray 6C                              |
| LED colours                         | Red, Green, Cyan, Yellow, Magenta         |
| Display technology                  | Full graphic E Ink display                |
| Resolution (pixels)                 | 400 x 300                                 |
| Active display area (mm)            | 85 x 64                                   |
| Pixel density                       | 120dpi                                    |
| Pixel colours                       | Black, White, Red<br>Black, White, Yellow |
| Operating temperature               | 5°C to 30°C                               |
| Operating frequency                 | 2.4GHz ISM Band                           |
| Label updates / hour / access point | 2,500                                     |
| Battery lifetime                    | 5 years, 2 updates per day                |
| Battery                             | CR2450x 3pc                               |
| Viewing angles                      | Nearly 180 degree                         |
| Useable pages                       | 2 pages                                   |
| Encryption                          | 128-bit Advanced Encryption Standard      |
| NFC                                 | Available                                 |
| Wireless firmware update            | Yes                                       |
| Compliance                          | CE, FCC/IC, ROHS                          |

## Info Tag 5.83"

### Product Image



### Schematic Drawing

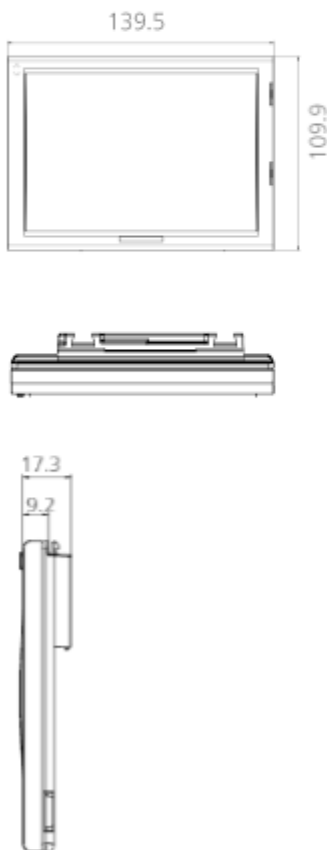

### Technical Specification


|                                     |   |
|-------------------------------------|---|
| Product code                        | IFT-25834                                 |
| Dimensions (mm)                     | 140 (W) x 110 (H) x 17 (D)                |
| Standard cover frame colour         | Cool Gray 6C                              |
| LED colours                         | Red, Green, Cyan, Yellow, Magenta         |
| Display technology                  | Full graphic E Ink display                |
| Resolution (pixels)                 | 648 x 480                                 |
| Active display area (mm)            | 85 x 64                                   |
| Pixel density                       | 138dpi                                    |
| Pixel colours                       | Black, White, Red<br>Black, White, Yellow |
| Operating temperature               | 5° C to 30° C                             |
| Operating frequency                 | 2.4GHz ISM Band                           |
| Label updates / hour / access point | 2,500                                     |
| Battery lifetime                    | 5 years, 2 updates per day                |
| Battery                             | CR2450 x 3pc                              |
| Viewing angles                      | Nearly 180 degree                         |
| Useable pages                       | 2 pages                                   |
| Encryption                          | 128-bit Advanced Encryption Standard      |
| NFC                                 | Available                                 |
| Wireless firmware update            | Yes                                       |
| Compliance                          | CE, FCC/IC, ROHS                          |

## Info Tag 7.5"

### Product Image



### Schematic Drawing

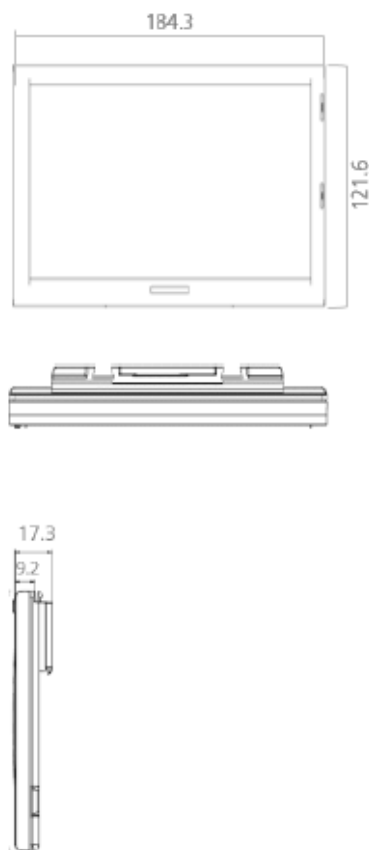

### Technical Specification

|                                     |   |
|-------------------------------------|---|
| Product code                        | IFT-27504                                 |
| Dimensions (mm)                     | 184 (W) x 122 (H) x 17 (D)                |
| Standard cover frame colour         | Cool Gray 6C                              |
| LED colours                         | Red, Green, Cyan, Yellow, Magenta         |
| Display technology                  | Full graphic E Ink display                |
| Resolution (pixels)                 | 800 x 480                                 |
| Active display area (mm)            | 163 x 98                                  |
| Pixel density                       | 125dpi                                    |
| Pixel colours                       | Black, White, Red<br>Black, White, Yellow |
| Operating temperature               | 5°C to 30°C                               |
| Operating frequency                 | 2.4GHz ISM Band                           |
| Label updates / hour / access point | 2,500                                     |
| Battery lifetime                    | 5 years, 2 updates per day                |
| Battery                             | CR2450 x 3pc                              |
| Viewing angles                      | Nearly 180 degree                         |
| Useable pages                       | 2 pages                                   |
| Encryption                          | 128-bit Advanced Encryption Standard      |
| NFC                                 | Available                                 |
| Wireless firmware update            | Yes                                       |
| Compliance                          | CE, FCC/IC, ROHS                          |



